

# Product Data Sheet

844-(5)-05/14




Makers of Fine Paint Since 1962

ISSUED: 10 May 2014

Page 1 of 2

## 844 Timbertone

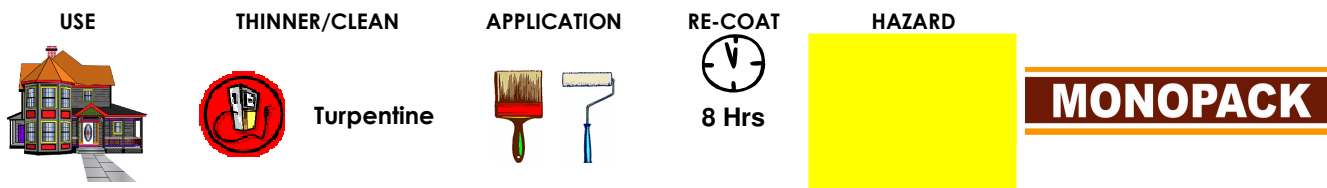

*A single pack stable polyurethane clear coating designed for application to interior woodwork. Dries very fast to a tough finish of exceptional resistance to abrasion, heat water and alcohol. Wipes clean easily, seals and protects against dirt and stains.*

**USES:** A finishing coat for all finely sanded interior timber such as panelling, architraves, doors, skirting, ceiling beams, partitions, furniture, wooden floors etc. It may be used over stained finishes.

**SURFACE PREPARATION:** Surface to be painted should be cleaned, dry and free from oil and grease and be well sanded. Cracks, nail holes and surface imperfections should be filled with a top grade Plastic Wood. Open grain timber should be filled with Wood Filler tinted to the colour of the new timber. 841 Pigmented Wiping Stain is recommended to obtain desired colour.

**APPLICATION:** Stir thoroughly until product is uniform. Apply 2 or 3 coats by brush or roller and allow overnight to dry. Sanding between coats is essential. Use fine steel wool to give the best results.

**THINNING:** Ready for use.

**CLEAN UP:** Brushes and equipment wash clean in Mineral Turpentine.

**DRYING:** Touch dry 2 hours. Hard dry to handle 6 hours at 25°C.

**COLOUR:** Clear.

**FINISH:** Gloss, Satin or Matt.

**COVERAGE:** Theoretical coverage is 15 m<sup>2</sup>/Litre at 25 micrometres dry film thickness.

**PACK SIZES:** 1 Litre, 4 Litre.

**VEHICLE TYPE:** Polyurethane Alkyd.

**PIGMENT TYPE:** Specially selected matting agent.

### FILM PROPERTIES:

Solvent Resistance	Good. (Hydrocarbon)	Chemical Resistance	Fair.
Abrasion Resistance	Excellent.	Impact Resistance	Excellent.
Heat Resistance	Good up to 95°C.	Flexibility	Good.

### TOPLINE PAINT PTY LTD

Telephone: (08) 8384 1188

33 ALDERSHOT ROAD, LONSDALE, SOUTH AUSTRALIA 5160.

Fax: (08) 8326 1824

E-mail: admin@toplinepaint.com.au

Customers need to appreciate that as Topline Paint cannot control the conditions under which our products are used, we therefore are unable to guarantee suitability or accuracy in every situation. If any doubt exists, do check with our technical people. Before large-scale use always test on a small sample and ascertain suitability. No warranties express or implied are made. The risks and liability arising from handling, storage, use and compliance with legal restrictions, rests with the buyer.





## 844 Timbertone

### PRECAUTIONS:

*The following information is a general guide only. Industrial users (ie where the product is being used in the workplace) are legally required to have available a Material Safety Data Sheet on this product. If you are unsure if you have an MSDS on this product please contact Topline Paint and one will be provided.*

**Safety Directions:** **KEEP OUT OF REACH OF CHILDREN – DO NOT SWALLOW.** Breathing the vapour is harmful and may cause lung irritation. Avoid contact with skin and eyes. Wear suitable, protective clothing, eye protection and impervious gloves when mixing and using. Handling and usage of this product must be carried out under well ventilation conditions that prevent inhalation of vapours, dust or mist. Use the appropriate breathing equipment (refer to Aust Stand. 1716) when ventilation is restricted. Keep containers closed when not in use. Eliminate any source of ignition (open fires, pilot lights, furnaces, spark producing switches etc.) as this product is flammable. **DO NOT SMOKE.** Take precautionary measures against static discharges. Used clean up rags may spontaneously ignite. To avoid ignition immerse in water or store in a sealable glass container.

**First Aid Instructions:** If affected by inhalation, remove to fresh air. If breathing difficulty persists or occurs later, consult a doctor. If swallowed, **DO NOT INDUCE VOMITING** drink plenty of water and seek medical advice. Contact a Doctor of Poisons Information Centre (Phone 131126). If skin contact occurs, remove contaminated clothing and wash skin thoroughly with soap and water. If irritation occurs seek prompt medical advice. Immerse contaminated clothing in water for 24 hours and do not use until laundered. In case of eye contact, hold eyes open and flood with running water for at least 15 minutes seek medical advice.

**Leaks, Spills and Disposal:** To prevent ignition of fumes product shut off all ignition sources. Contain or shut off leak if safe to do so. For large leaks or spills of volatile, flammable product, use respiratory protection, protective apparel and footwear. Spills should be absorbed either with rags (small spill) or dry sand/earth (large spill). In the case of flammable product spillage, use spark free implements to place rags or absorbed material into a solvent resistant container. Cover with water for 24 hours before disposal. DO NOT pour left over product down the drain – retain it in marked sealed container for future use or disposal through chemical waste collection programs. Dried empty cans can be recycled and should be disposed of via council steel recycling facilities.

**Fire:** Use foam and breathing apparatus. Avoid breathing products of combustion.

**Hazard:** The coloured square at the top of page 1 is provided for a quick reference as to the hazard level of a product. Blue refers to coatings with low hazard (eg water based wall paints). Yellow refers to medium hazard products such as QD enamels, which contain solvents, are flammable and need respirators for vapour protection. Red refers to products with special hazards such as isocyanate cured two pack finishes