

Product Data Sheet

872-(2)-04/14




Makers of Fine Paint Since 1962

ISSUED: 15 April 2014

Page 1 of 2

872 Moisture Cured Urethane

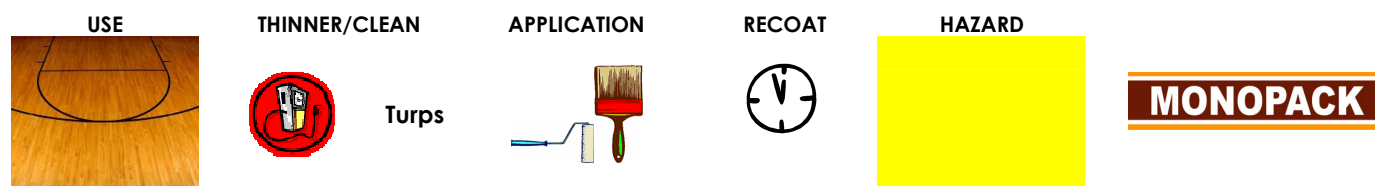

Monopack Moisture Cured Urethane where a hard and abrasion resistant finish is required.

PRINCIPAL USES: Monopack Moisture Cured Urethane is recommended as a coating for timber, cork and parquet floors where a hard and abrasion resistant finish is required.

SURFACE PREPARATION: New and worn floors require sanding to a fine finish, followed by a thorough vacuum to remove all dust. Old floors require washing with hot water and detergent, followed by thorough sanding with a 220 grit screenback and thorough vacuum. Test for compatibility by applying Monopack Moisture Cured Urethane on a small section of floor. Wipe floor with Monopack Cleaning Solvent before commencing application.

APPLICATION: Apply with a brush or short nap mohair roller, taking care to apply even coats. Thinning is not recommended. Apply only at temperatures between 15 & 30° Celsius. New cork and timber floors will require three coats for optimum results. Allow overnight dry and sanding with 220 grit screenback between coats. Wash brushes and rollers with Monopack Cleaning Solvent. Wet Edge Extender and Anti Rejection Fluid are also available.

CLEAN UP: Clean all equipment with Mineral Turps

PACKAGING: 10 Litre, 20 Litre

DRYING: Dry to sand after 12 hours at room temperature of 25° and 50% humidity. Precautions such as sealing doorways and ensuring a wet edge at all times is recommended. Monopack Moisture Cured Urethane requires 7-10 days to fully cure by absorbing moisture from the atmosphere. Avoid heavy foot traffic during this period. Use protective pads under legs of furniture. Avoid stiletto heels at all times.

COVERAGE: Coverage depends on thickness of application, type of timber, and it's absorbency. Hardwoods: 10 – 12 m²/lt

SAFETY DIRECTIONS: See over page.

SHELF LIFE: Best if used within 12 months of manufacture when stored in unopened containers under normal conditions of temperature and humidity.

TOPLINE PAINT PTY LTD

Telephone: (08) 8384 1188

33 ALDERSHOT ROAD, LONSDALE, SOUTH AUSTRALIA 5160.

Fax: (08) 8326 1824

E-mail: admin@toplinepaint.com.au

Customers need to appreciate that as Topline Paint cannot control the conditions under which our products are used, we therefore are unable to guarantee suitability or accuracy in every situation. If any doubt exists, do check with our technical people. Before large-scale use always test on a small sample and ascertain suitability. No warranties express or implied are made. The risks and liability arising from handling, storage, use and compliance with legal restrictions, rests with the buyer.





872 Moisture Cured Urethane

PRECAUTIONS:

The following information is a general guide only. Industrial users (ie where the product is being used in the workplace) are legally required to have available a Material Safety Data Sheet on this product. If you are unsure if you have an MSDS on this product please contact Topline Paint and one will be provided.

Safety Directions: **KEEP OUT OF REACH OF CHILDREN – DO NOT SWALLOW.** Breathing the vapour is harmful and may cause lung irritation. Avoid contact with skin and eyes. Wear suitable, protective clothing, eye protection and impervious gloves when mixing and using. Handling and usage of this product must be carried out under well ventilation conditions that prevent inhalation of vapours, dust or mist. Use the appropriate breathing equipment (refer to Aust Stand. 1716) when ventilation is restricted. Keep containers closed when not in use. Eliminate any source of ignition (open fires, pilot lights, furnaces, spark producing switches etc.) as this product is flammable. **DO NOT SMOKE.** Take precautionary measures against static discharges. Used clean up rags may spontaneously ignite. To avoid ignition immerse in water or store in a sealable glass container.

First Aid Instructions: If affected by inhalation, remove to fresh air. If breathing difficulty persists or occurs later, consult a doctor. If swallowed, **DO NOT INDUCE VOMITING** drink plenty of water and seek medical advice. Contact a Doctor of Poisons Information Centre (Phone 131126). If skin contact occurs, remove contaminated clothing and wash skin thoroughly with soap and water. If irritation occurs seek prompt medical advice. Immerse contaminated clothing in water for 24 hours and do not use until laundered. In case of eye contact, hold eyes open and flood with running water for at least 15 minutes seek medical advice.

Leaks, Spills and Disposal: To prevent ignition of fumes product shut off all ignition sources. Contain or shut off leak if safe to do so. For large leaks or spills of volatile, flammable product, use respiratory protection, protective apparel and footwear. Spills should be absorbed either with rags (small spill) or dry sand/earth (large spill). In the case of flammable product spillage, use spark free implements to place rags or absorbed material into a solvent resistant container. Cover with water for 24 hours before disposal. DO NOT pour left over product down the drain – retain it in marked sealed container for future use or disposal through chemical waste collection programs. Dried empty cans can be recycled and should be disposed of via council steel recycling facilities.

Fire: Use foam and breathing apparatus. Avoid breathing products of combustion.

Hazard: The coloured square at the top of page 1 is provided for a quick reference as to the hazard level of a product. Blue refers to coatings with low hazard (eg water based wall paints). Yellow refers to medium hazard products such as QD enamels, which contain solvents, are flammable and need respirators for vapour protection. Red refers to products with special hazards such as isocyanate cured two pack finishes