




673 Exterior Wood Oil & Exterior Wood Oil Plus

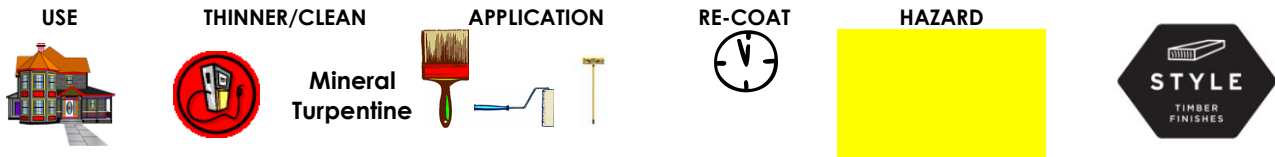

673 Exterior Wood Oil & Exterior Wood Oil Plus is a hard wearing oil/resin penetrating timber finish for use on exterior and some interior timber surfaces and contains a fungicide and is therefore resistant to mould attack and is formulated to resist darkening with age. 673 Exterior Wood Oil & Exterior Wood Oil Plus is non film forming so cannot crack peel or blister.

USES: 673 Exterior Wood Oil is suitable for use on exterior cladding, windows, fascias, pergolas, decking and garden furniture. It may also be used on interior timber floors where an "oiled look" is preferred. In exterior situations where the timber is fully exposed to the sun, when correctly applied, 673 Exterior Wood Oil should be re-coated approx. every 9-12 months.

PLUS: 673 Exterior Wood Oil is available as a true clear and as 673 Exterior Wood Oil Plus. 673 Exterior Wood Oil Plus contains a small quantity of transparent iron oxide yellow pigment. It is not enough pigment to introduce any significant colour change on timber when compared to 673 Exterior Wood Oil. The addition of the transparent pigment significantly increases the life of the oil on timber.

DIRECTIONS EXTERIOR: New un-coated exterior timber should be flood brushed with one coat of 649 Deeptreat prior to applying 673 Wood Oil. Particular attention should be paid to joins, nail holes and cut ends. 673 Exterior Wood Oil is supplied ready for use, and should be applied un-thinned. Apply by brush or roller as a two to three coat system. Should an excess of 673 Exterior Wood Oil pool on the surface after the final coat, lightly wipe off any excess with a soft cloth before allowing to dry.

DIRECTIONS INTERIOR: New timber joinery or sanded floors may be coated as a saturate system, where the floor is flood coated with 673 Exterior Wood Oil to allow maximum penetration. Any remaining excess 673 Wood Oil pooling on the surface should be wiped off. The floor can then be machine dry buffed to achieve a matt polished effect.

FLOOR MAINTENANCE: As 673 Exterior Wood Oil is non film forming it simply needs re-coating as required. Each application continues to harden the surface. It is important to keep floor free of sand or grit. Regular sweeping and occasional mopping is all that is required. Placing dust collecting mats at entrance doors will help reduce surface wear.

PREVIOUSLY VARNISHED OR PAINTED FLOORS: Any paint or varnish must be completely removed prior to applying 673 Exterior Wood Oil. Exterior decks that have been badly weathered or stained may be restored using 683 Timber Clean before oiling.

CLEAN UP: Clean equipment with mineral turpentine. Do NOT clean hands with solvents, use a suitable hand cleaner.

THINNING: Not recommended.

DRYING TIME: 2 - 8 hours depending on temperature. Re-coat is possible as soon as previous coat is dry. Interior surfaces will take longer to fully harden therefore on floors, light traffic is recommended for the first few days. Do not apply product at temperatures below 10°C or above 30°C or when relative humidity is greater than 80%. Do not apply in direct sun or to very hot or cold timber.

COVERAGE: Hardwoods 9-12 m²/Litre, Softwoods 7-10 m²/Litre, Rough sawn softwoods 6-8 m²/Litre.

COLOUR: Light honey colour. Also available in a range of highly transparent tinted colours.

PACKAGING: Available in 1Litre, 4Litre, 10Litre cans and 20Litre pails.

TOPLINE PAINT PTY LTD

33 ALDERSHOT ROAD, LONSDALE, SOUTH AUSTRALIA 5160.

Telephone: (08) 8384 1188

Fax: (08) 8326 1824

E-mail: admin@toplinepaint.com.au

Customers need to appreciate that as Topline Paint cannot control the conditions under which our products are used, we therefore are unable to guarantee suitability or accuracy in every situation. If any doubt exists, do check with our technical people. Before large-scale use always test on a small sample and ascertain suitability. No warranties express or implied are made. The risks and liability arising from handling, storage, use and compliance with legal restrictions, rests with the buyer.





673 Exterior Wood Oil & Exterior Wood Oil Plus

PRECAUTIONS:

The following information is a general guide only. Industrial users (ie where the product is being used in the workplace) are legally required to have available a Safety Data Sheet on this product. If you are unsure if you have an SDS on this product please contact Topline Paint and one will be provided.

Safety Directions: **KEEP OUT OF REACH OF CHILDREN – DO NOT SWALLOW.** Breathing the vapour is harmful and may cause lung irritation. Avoid contact with skin and eyes. Wear suitable, protective clothing, eye protection and impervious gloves when mixing and using. Handling and usage of this product must be carried out under well ventilation conditions that prevent inhalation of vapours, dust or mist. Use the appropriate breathing equipment (refer to Aust Stand. 1716) when ventilation is restricted. Keep containers closed when not in use. Eliminate any source of ignition (open fires, pilot lights, furnaces, spark producing switches etc.) as this product is flammable. **DO NOT SMOKE.** Take precautionary measures against static discharges. Used clean up rags may spontaneously ignite. To avoid ignition immerse in water or store in a sealable glass container.

First Aid Instructions: If affected by inhalation, remove to fresh air. If breathing difficulty persists or occurs later, consult a doctor. If swallowed, **DO NOT INDUCE VOMITING** drink plenty of water and seek medical advice. Contact a Doctor of Poisons Information Centre (Phone 131126). If skin contact occurs, remove contaminated clothing and wash skin thoroughly with soap and water. If irritation occurs seek prompt medical advice. Immerse contaminated clothing in water for 24 hours and do not use until laundered. In case of eye contact, hold eyes open and flood with running water for at least 15 minutes seek medical advice.

Leaks, Spills and Disposal: To prevent ignition of fumes product shut off all ignition sources. Contain or shut off leak if safe to do so. For large leaks or spills of volatile, flammable product, use respiratory protection, protective apparel and footwear. Spills should be absorbed either with rags (small spill) or dry sand/earth (large spill). In the case of flammable product spillage, use spark free implements to place rags or absorbed material into a solvent resistant container. Cover with water for 24 hours before disposal. DO NOT pour left over product down the drain – retain it in marked sealed container for future use or disposal through chemical waste collection programs. Dried empty cans can be recycled and should be disposed of via council steel recycling facilities.

Fire: Use foam and breathing apparatus. Avoid breathing products of combustion.

Hazard: The coloured square at the top of page 1 is provided for a quick reference as to the hazard level of a product. Blue refers to coatings with low hazard (eg water based wall paints). Yellow refers to medium hazard products such as QD enamels, which contain solvents, are flammable and need respirators for vapour protection. Red refers to products with special hazards such as isocyanate cured two pack finishes