

# Product Data Sheet

895-(3)-02/18




Makers of Fine Paint Since 1962

ISSUED: 23 February 2018

Page 1 of 2

## 895 Wood Floor Oil

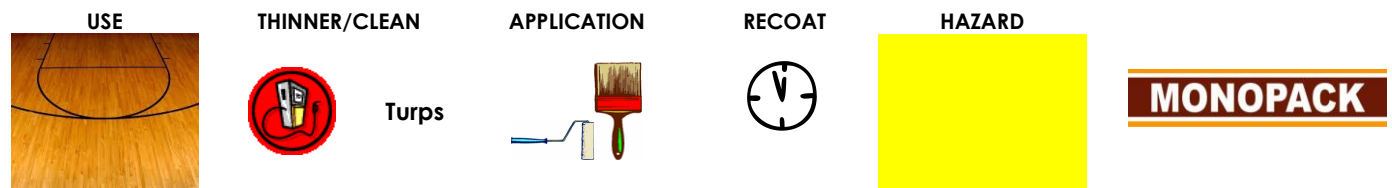

*Monopack 895 Wood Oil is a tough penetrating natural oil based seal for all types of wooden floors including parquetry, school gymnasiums and sports halls*

**PRINCIPAL USES:** Monopack Wood Floor Oil is recommended as a tough penetrating natural oil based seal for all types of wooden floors including parquetry, school gymnasiums and sports halls. It provides a lower cost alternative to urethane based surface seals.

**SURFACE PREPARATION:** New timber or parquet floors require sanding to a fine finish followed by vacuum and sweep to provide a dust free surface. Floors previously sealed with Monopack Wood Floor Oil and requiring a refresher coat must be pre-cleaned to remove all contaminants such as cleaning residues, grease, perspiration etc. using a solution of Monopack Floor Clean.

**MAINTENANCE:** Daily sweep with a scissor mop and weekly wet mop or auto scrub (avoid excess water). Annually apply a top-up coat of Monopack Wood Floor Oil.

**PACKAGING:** 4 Litre, 20 Litre

**APPLICATION GUIDELINES:** If painted court markings are required they must be applied to the bare fine sanded surface before Monopack Wood Floor Oil is applied. Use Monopack Line Marking Paint and allow to dry overnight before applying Monopack Wood Floor Oil.

Monopack Wood Floor Oil is designed to deeply penetrate the timber and must not be used to form a surface coating. Apply Monopack Wood Floor Oil sparingly with a mop or applicator to provide thin but even cover without puddles. Allow to soak in for 15 minutes. Then buff with a rotary machine fitted with a soft (red) nylon pad to achieve an even finish. A second application of Monopack Wood Floor Oil may be required an open grain timber species.

**CLEAN UP:** Clean all equipment with Mineral Turps

**SAFETY DIRECTIONS:** Flammable Liquid 3, Packaging Group II, UN No. 1263, Paint. Hazchem 3(Y) E.

**TOPLINE PAINT PTY LTD**

Telephone: (08) 8384 1188

**33 ALDERSHOT ROAD, LONSDALE, SOUTH AUSTRALIA 5160.**

Fax: (08) 8326 1824

E-mail: admin@toplinepaint.com.au

Customers need to appreciate that as Topline Paint cannot control the conditions under which our products are used, we therefore are unable to guarantee suitability or accuracy in every situation. If any doubt exists, do check with our technical people. Before large-scale use always test on a small sample and ascertain suitability. No warranties express or implied are made. The risks and liability arising from handling, storage, use and compliance with legal restrictions, rests with the buyer.





## 895 Wood Floor Oil

### PRECAUTIONS:

*The following information is a general guide only. Industrial users (ie where the product is being used in the workplace) are legally required to have available a Safety Data Sheet on this product. If you are unsure if you have an SDS on this product please contact Topline Paint and one will be provided.*

**Safety Directions:** **KEEP OUT OF REACH OF CHILDREN – DO NOT SWALLOW.** Breathing the vapour is harmful and may cause lung irritation. Avoid contact with skin and eyes. Wear suitable, protective clothing, eye protection and impervious gloves when mixing and using. Handling and usage of this product must be carried out under well ventilation conditions that prevent inhalation of vapours, dust or mist. Use the appropriate breathing equipment (refer to Aust Stand. 1716) when ventilation is restricted. Keep containers closed when not in use. Eliminate any source of ignition (open fires, pilot lights, furnaces, spark producing switches etc.) as this product is flammable. **DO NOT SMOKE.** Take precautionary measures against static discharges. Used clean up rags may spontaneously ignite. To avoid ignition immerse in water or store in a sealable glass container.

**First Aid Instructions:** If affected by inhalation, remove to fresh air. If breathing difficulty persists or occurs later, consult a doctor. If swallowed, **DO NOT INDUCE VOMITING** drink plenty of water and seek medical advice. Contact a Doctor of Poisons Information Centre (Phone 131126). If skin contact occurs, remove contaminated clothing and wash skin thoroughly with soap and water. If irritation occurs seek prompt medical advice. Immerse contaminated clothing in water for 24 hours and do not use until laundered. In case of eye contact, hold eyes open and flood with running water for at least 15 minutes seek medical advice.

**Leaks, Spills and Disposal:** To prevent ignition of fumes product shut off all ignition sources. Contain or shut off leak if safe to do so. For large leaks or spills of volatile, flammable product, use respiratory protection, protective apparel and footwear. Spills should be absorbed either with rags (small spill) or dry sand/earth (large spill). In the case of flammable product spillage, use spark free implements to place rags or absorbed material into a solvent resistant container. Cover with water for 24 hours before disposal. DO NOT pour left over product down the drain – retain it in marked sealed container for future use or disposal through chemical waste collection programs. Dried empty cans can be recycled and should be disposed of via council steel recycling facilities.

**Fire:** Use foam and breathing apparatus. Avoid breathing products of combustion.

**Hazard:** The coloured square at the top of page 1 is provided for a quick reference as to the hazard level of a product. Blue refers to coatings with low hazard (eg water based wall paints). Yellow refers to medium hazard products such as QD enamels, which contain solvents, are flammable and need respirators for vapour protection. Red refers to products with special hazards such as isocyanate cured two pack finishes